


Aluminum Tape

Solution for Reliable Thermocouple Attachment

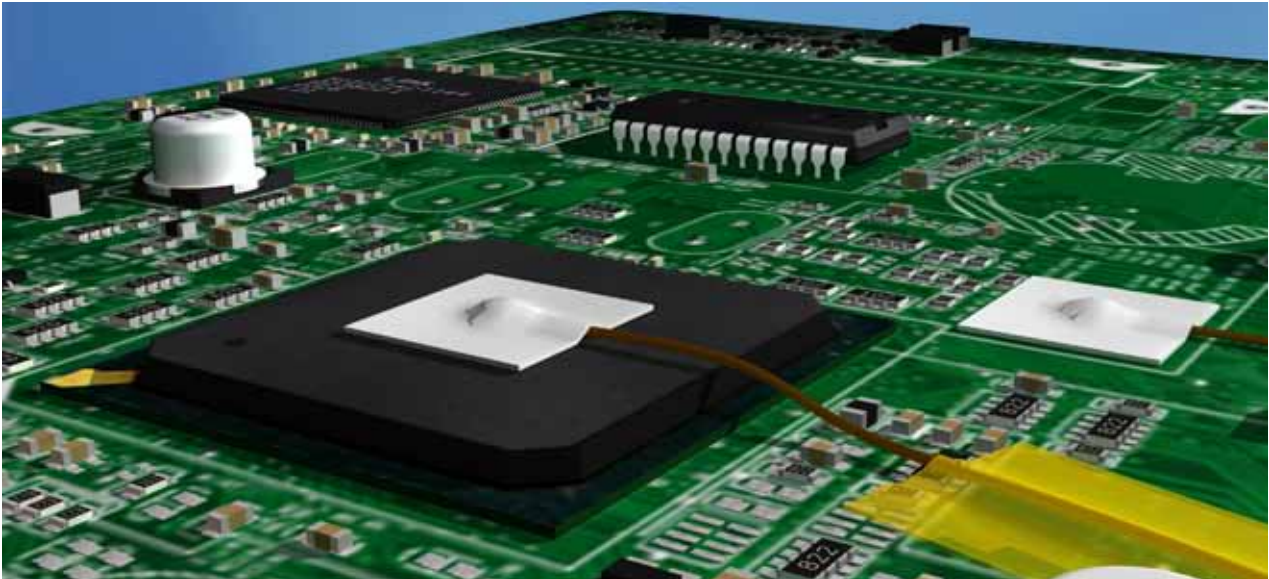

Don't Sacrifice PCBS for Profiling

- Non-destructive TC attachment
- Reliable TC readings
- No waiting for curing or soldering
- Fast, easy setup

TECHNICAL SPECIFICATIONS

TYPICAL PROPERTIES	SPECIFICATIONS
PHYSICAL	
Color	White
Thickness, mm (inch)	0.15 (0.006)
Adhesive CTE, ppm/°C lppm/°F	300
THERMAL	
Thermal impedance °C -cm ² /W (°C -in ² /W)	3.4 (0.5)
Thermal conductivity W/m-K	0.5
REGULATORY	
RoHS compliant	Yes
Shelf life, months after purchase	12
Flammability rating (See UL File E140244)	V-0



**Double Sided Thermally
Conductive Tape Used for
Attaching Thermocouples to PCBs**

sold in 1 inch x 10 foot rolls



Technical Support — 24 Hours EveryDay — Everywhere

Risk Free Guarantee

All KIC products are designed to give maximum value and fast payback by streamlining your thermal process. Investment in a KIC product is a step toward total process control and quality management. All KIC products come with a no questions asked, 30 day money back guarantee. For more information on any of our products or service please visit us on the Web at: www.kicthermal.com or www.kic.cn.